



06/22/00

THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventors: Jianhua Wang, Arto Karppanen, Marko Suoknuuti
Jaakko Teinilä, and Jan-Erik Ekberg

For: APPARATUS, AND ASSOCIATED METHOD, FOR INTEGRATING OPERATION OF PACKET RADIO
COMMUNICATION SYSTEMS

Enclosed are:

- ☒ 7 sheets of drawing.
- ☐ An assignment of the invention to Nokia Corporation
- ☐ A certified copy of a _____ application
- ☐ An associate power of attorney.
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☒ An **unsigned** Declaration and Power of Attorney.
- ☒ Check in the amount of \$690.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	20-20 =	-0-
INDEP CLAIMS	3-3 =	-0-
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

SMALL ENTITY			OTHER THAN A SMALL ENTITY	
RATE	FEE	OR	RATE	FEE
	\$345	OR		\$ 690
x 9 =	\$	OR	x18 =	\$ -0-
x39 =	\$	OR	x78 =	\$ -0-
x130 =	\$-0-	OR	+260 =	\$ -0-
TOTAL	\$	OR	TOTAL	\$ 690

* ☐ Please charge my Deposit Account No. 08-2623 in the amount of \$_____. A duplicate copy of this set is enclosed.

☒ A check in the amount of \$ 690 to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 08-2623.

- ☒ Any patent application processing fees under 37 CFR 17.
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claim

Robert H. Kelly
Robert H. Kelly, Regis. No. 33,922
HOLLAND & HART LLP
555 17th Street, #3200
P.O. Box 8749
Denver, Colorado 80201-8749
719/475-6463

21 June 00



PATENT
EXPRESS MAIL NO. EL498242367US
Attorney Docket No. NC18612
Client/Matter No. 40725.830101.000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
Jianhua Wang, Arto) Group Art Unit: _____
Karppanen, Marko Suoknuuti)
Jaakko Teinilä, and Jan-) Examiner: _____
Erik Ekberg)
Serial No. _____)
Filed: Herewith)
For: APPARATUS, AND)
ASSOCIATED METHOD, FOR)
INTEGRATING OPERATION OF)
PACKET RADIO COMMUNICATION)
SYSTEMS)

CERTIFICATE OF MAILING BY EXPRESS MAIL

Box PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

The undersigned hereby certifies that the following documents:

1. Transmittal letter for Patent Application;
2. Utility Patent Application;
3. Unexecuted Combined Declaration and Power of Attorney;
4. 7 sheets of drawings;
5. \$690 filing fee;
6. Return postcard; and
7. Certificate of Mailing By Express Mail

relating to the above application, were deposited as "Express Mail", Mailing Label No. EL498242367US with the United States Postal Service, addressed to Box PATENT APPLICATION, The Assistant Commissioner for Patents, Washington, D.C., 20231,

June 22, 2000

June 22, 2000
Date

2, Jan 00
Date

Paulitta Ingwersen
Mailer

Robert H. Kelly
Robert H. Kelly, Reg. No. 33,922
Attorney for Applicant
HOLLAND & HART LLP
555-17th Street, Suite 3200
Denver, Colorado 80202
(719) 475-6463

**APPARATUS, AND ASSOCIATED METHOD, FOR
INTEGRATING OPERATION OF PACKET RADIO
COMMUNICATION SYSTEMS**

5 **CROSS REFERENCE TO RELATED APPLICATIONS**

The present application is related to application, serial number _____, attorney docket number NC26128, filed concurrently herewith, the contents of which are incorporated by reference herein.

10 The present invention relates generally to a manner by which to
integrate operation of packet radio communication systems to form an
integrated communication system therefrom. More particularly, the present
invention relates to apparatus, and an associated method, by which to combine
operation of a first packet radio system, such as a WLAN (Wireless Local
Area Network) defined pursuant to the IEEE 802.11 standard, with a second
15 packet radio system, such as a system which provides for GPRS (General
Packet Radio Service). Through operation of an embodiment of the present
invention, advantages of a WLAN, such as high data rates and relatively
inexpensive infrastructure, is provided while also providing global mobility
and high security of a GPRS system.

20 **BACKGROUND OF THE INVENTION**

Usage of multi-user radio communication systems has become widely
popular in recent years. Advancements in communication technologies have
permitted the implementation, and portable utilization, of such communication
systems, thereby to permit large numbers of users to communicate
25 therethrough.

A radio communication system, similar to other types of communication systems, is formed of a sending station and a receiving station interconnected by way of a communication channel. In a radio communication system, a radio communication channel forms the communication channel. A radio communication channel is defined upon a portion of the electromagnetic spectrum.

In contrast, a communication channel defined in a wireline communication system is defined upon a wireline connection extending between the sending and receiving stations. Because a radio communication channel, defined upon a portion of the electromagnetic spectrum, is used to communicate data between the sending and receiving stations in a radio communication system, the need for a wireline connection to interconnect the sending and receiving station, required in a wireline communication system, is obviated. The mobility of communications in a radio communication system is inherently greater than that permitted in a typical wireline communication system.

Digital communication techniques have been implemented in radio, as well as other, communication systems. Digital communication techniques generally permit the communication system in which the techniques are implemented to achieve greater communication capacity than the capacity permitted in a communication system utilizes conventional, analog communication techniques.

A cellular communication system is exemplary of a communication system which is widely utilized and which regularly is constructed to make use of digital communication techniques. Communications in a cellular communication system generally are effectuated by way of mobile station carried by a user. A mobile station is a radio transceiver permitting two-way communication of radio signals with network infrastructure of the cellular communication system. The network infrastructure of the cellular communication system is connected, for instance, to a PSTN (Public-

002290-BET6656

Switched, Telephonic Network), thereby to permit communication between the mobile station and a remote station, coupled to the PSTN.

A cellular communication system generally is operable over a fairly large geographical region, sometimes national or even extra-national in scope.

5 A user of the mobile station is able to communicate by way of the cellular communication system when located at virtually any location encompassed by the cellular communication system. And, as the user, together with the mobile station, travels, handover of communications through successive portions of the network infrastructure of the cellular communication system permits
10 continued communications by way of the mobile station.

At least one cellular communication system, the GSM (Global System for Mobile communications) cellular communication system includes the possibility that packet radio services pursuant to GPRS (General Packet Radio Service) shall permit the communication of digital data, packetized into
15 packets of data. Communication of packet data pursuant to GPRS is effectuated at the same level of security, QoS (Quality of Service) level, and global mobility, as that provided for conventional GSM, cellular communications. Conventional proposals for GPRS messaging, however, permit only relatively low data communication rates for multimedia services,
20 particularly when large numbers of users use the system to effectuate conventional cellular communications. Installation of a GPRS system is also relatively costly.

Digital communication techniques are also utilized in conventional LANs (Local Area Networks). LANs conventionally interconnect groups of
25 computer work stations within an office area, or the like, to permit communications therebetween. Wireless networks, operable in manners analogous to wired LANs, referred to as WLANs (Wireless Local Area Networks), have also been developed and are utilized to communicate data over a radio link. Some of such systems are able to provide for voice, as well
30 as nonvoice, communications.

One system, standards of which are set forth in the IEEE 802.11 specification, provides for fast data communications in a WLAN. A WLAN system constructed pursuant to the IEEE 802.11 standard provides a relatively quick data rate to effectuate communication of data as well as a relatively simple infrastructure. However, in contrast to GPRS systems, lessened security provisions are implemented. Additionally, a WLAN inherently does not provide wide-area mobility. If a manner could be provided by which to integrate operation of a GPRS system and a WLAN system, incorporating the advantages of each, the resultant, integrated system would advantageously provide an improved communication system.

It is in light of this background information related to radio communication systems that the significant improvements of the present invention have evolved.

SUMMARY OF THE INVENTION

The present invention, accordingly, advantageously provides apparatus, and an associated method, by which to integrate operation of packet radio communication systems to form an integrated system.

In one aspect of the present invention, a manner is provided by which to combine operation of a first packet radio system, such as a WLAN (Wireless Local Area Network) defined pursuant to the IEEE 802.11 standard with a packet radio communication system, such as a system which provides for GPRS (General Packet Radio Service). A resultant, integrated system is provided therefrom. Through operation of various embodiments of the present invention, data transport and mobility management are both provided for in the integrated system.

A WLAN system constructed to comply with the parameters set forth in the IEEE 802.11 standard provides for the communication of packet data at relatively quick data rates and requires the use of only relatively simple infrastructure installations. And, a GPRS system constructed to comply with

the parameters set forth in an appropriate GPRS standard provides for the communication of packet data in a manner which provides relatively high levels of security pursuant to a QoS (Quality of Service) structure, while also maintaining high levels of mobility of communications as a GPRS system is generally installed in over a large geographical area. A WLAN system, in contrast, fails to provide wide-area mobility, security, and QoS support provided in a GPRS system. And, a GRPS system requires relatively costly infrastructure investments while providing relatively low data rates. Generally, the advantages inherent in a WLAN system are also the disadvantages of a GPRS system, and the advantages of a GPRS system are also the disadvantages of a WLAN system. The integrated system provided for through an embodiment of the present invention advantageously makes use of the advantageous aspects of both the WLAN and GPRS system, thereby to provide an integrated system of improved characteristics.

In one aspect of the present invention, the communication system is defined in terms of logical layers. The integrated system of an embodiment of the present invention includes a logical layer, referred to as a WIP (WLAN Integration Protocol) layer positioned between lower layers and upper-level layers. The lower layers are formed of existing layers defined in the WLAN protocol, and the upper-level layers are formed of existing logical layers defined in the GPRS protocol. The WIP layer integrates the layers defined in the separate systems so that data generated by an upper-level layer is communicated through the lower-level layers in a transparent manner while maintaining the operational features of communications in the separate communication systems.

In another aspect of the present invention, a WIP layer is provided at a mobile station operable in a packet radio communication system constructed pursuant to an embodiment of the present invention. The WIP layer is positioned between upper-level, GPRS-compliant layers and lower-level, WLAN-compliant layers.

In another aspect of the present invention, an interworking element (IWE) is provided as an interface between structure of a WLAN and structure of a packet data network. The IWE is defined in terms of logical layers, and lower-level, WLAN-compliant layers.

5 In one implementation, the interworking element is formed of a modified SGSN (Serving GPRS Service Node). The interworking element is coupled by way of an Ethernet hub to a series of access points, defined in the WLAN system. Functional operation of the WIP layer provides for mobility management in the integrated GPRS-WLAN system. Functions such as cell
10 ID mapping, cell ID acquisition, paging, communication of messages needed for such functions, and PDU definitions, identifier mapper within the WIP protocol, and suspend/resume service function, are all provided through operation of the WIP layer of an embodiment of the present invention.

In these and other aspects, therefore, the present invention provides an
15 integrator, and an associated method, for a packet radio communication system for communicating packet data. The integrator integrates operation of a first packet data system having at least a first packet-data-system element with operation of a second packet data system having at least a second packet-data-system element, thereby to form an integrated system of the packet radio
20 communication system. An integration element is at least functionally coupled between the first packet-data-system element and the second packet-data-system element. The packet data of any selected information-element type is of a plurality of element types defined in either of the first packet data system and the second packet data system.

25 A more complete appreciation of the present invention and the scope thereof can be obtained from the accompanying drawings, which are briefly summarized below, the following description of the presently-preferred embodiment of the invention, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a functional block diagram of a packet radio communication system in which an embodiment of the present invention is operable.

5 Figure 2 illustrates a logical layer diagram showing portions of the integrated communication system forming a portion of the communication system shown in Figure 1.

10 Figure 3 illustrates a message sequence diagram representing signaling associated with data transfer during operation of the integrated communication system portion shown in Figure 2.

Figure 4 illustrates a message sequence diagram representing signaling generated during operation of the integrated communication system portion shown in Figure 2 during WLAN association operations and cell ID operations.

15 Figure 5 illustrates a message sequence diagram representing signaling generated during operation of an embodiment of the present invention during the performance of paging operations.

20 Figure 6 illustrates a message sequence diagram representing signaling generated during operation of an embodiment of the present invention in which a mobile station requests a suspension of data transfer.

Figure 7 illustrates a message sequence diagram representing signaling generated during operation of an embodiment of the present invention in which the mobile station requests resumption of communication of packet data with the mobile station.

25 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figure 1, a communication system, shown generally at 10, is operable to provide radio packet service with a mobile station, such as any of the mobile stations 12. In the exemplary implementation, a two-way

002290" GET 66550

communication of packet data is provided. That is to say, forward-link packets of data are transmitted to the mobile station and reverse-link packets of data are sent by the mobile station, both by way of radio links 14.

The mobile stations 12 are capable of movement, such as their carriage by a user. While initially positioned at a first location, a mobile station may thereafter be repositioned to be located at a second location, all within a geographical area encompassed by fixed infrastructure of the communication system.

Here, the fixed infrastructure is divided into two portions, a first portion 16 and a second portion 18. The first portion 16 is formed pursuant to an embodiment of the present invention, here an integrated system formed of a GPRS system and a WLAN system integrated theretogether. And, the second portion 18 is formed of a conventional GPRS system. Both the first and second portions 16 and 18 coupled to a GGSN (Gateway GPRS Service Node) 22 which, in turn, is connected to an IP (Internet Protocol), or other packet data, network 24.

The conventional GPRS system formed of the second portion 18 includes a plurality of Base Transceiver Stations (BTSs) 26. Each of the base transceiver stations defines a coverage area, e.g., one or more cells, within which radio links with mobile stations 12 are formable and between which handover of communications are effectuable as a mobile station moves through successive coverage areas during a communication session. Sets of the base transceiver stations are coupled to base station controllers 28 which are operable, in conventional manner, to control operation of the base transceiver stations. And, in turn, sets of the base station controllers are coupled to SGSNs (Serving GPRS Service Nodes) 32. Each SGSN is coupled to the GGSN 22. The GPRS system is operable pursuant to an appropriate GRPS standard to communicate packet-switched data between a mobile station 12 and another communication station. The GPRS system is, for instance, constructed together with a GSM (Global System for Mobile

Communications) cellular communication system in which communication stations must be authenticated prior to permission to communicate by way of the communication system. A high level of security is thereby provided in communications pursuant to a conventional GPRS or GSM-GPRS communication system.

The GPRS communication system portion 16 constructed pursuant to an embodiment of the present invention includes a plurality of spaced-apart access points 36 positioned throughout an area to be encompassed by the system portion 16. Each of the access points 36 defines a coverage area within which radio links 14 are formable with mobile stations 12 and pursuant to which communications are effectuable. The access points are connected to one another by way of lines 38 and to, here, an Ethernet switching hub 42. The Ethernet switching hub, in turn, is coupled to an IWE (Interworking Element) 44. And, the IWE 44 is connected to the GGSN 22. During a communication session, packet-switched communications are permitted with a mobile station 12. Here, the communications are effectuated over the radio links 14 in manners set forth in the IEEE 802.11 standard, or the like.

The integrated system of which the portion 16 is formed includes advantageous features of both the GPRS and the WLAN systems. Because communications over the radio links 14 are made in conformity with the WLAN standard, the high data rates and low infrastructure costs associated with the WLAN system are maintained. And, as other features of the GPRS system are maintained, the integrated communication system portion 16 provides the advantages of both a WLAN system and the GPRS system.

The IWE 44, as well as the construction of the mobile station 12, provides for the integration of the WLAN and GPRS systems. The functional positioning of the IWE in the Figure between the Ethernet switching hub 42 and the GGSN 22 is exemplary. Alternately, a fixed-site radio transceiver could be modified to perform the functions of the IWE. Alternately, in other implementations, the integrated communication system portion could include

elements of the fixed network infrastructure of a conventional GPRS system in which the functionality of the IWE is embodied in a base transceiver station, a base station controller, or a SGSN of such a system. Also, the functionality of the IWE could be embodied in an access point 36, or distributed amongst several access points.

Figure 2 illustrates the first communication system portion 16 in logical-layer form. Here, a single mobile station 12 is represented, and also a single access point 36 of the fixed network infrastructure of the communication system portion is also represented. And, the Ethernet switching hub 42 and the IWE 44 of the fixed infrastructure of the communication system portion is again illustrated in the Figure.

The mobile station 12 includes a logical layer, a WIP (WLAN Integration Protocol) layer 52 positioned between upper-level layers 54, 56, and 58, and lower-level layers 62 and 64. The layers 54-58 form LLC, SNDCP/GMM, and IP layers, all as defined pursuant to an appropriate GPRS standard. And, the layers 62 and 64 form WLAN MAC and WLAN PHY layers, respectively. The layers 62 and 64 are functionally operable as described in the IEEE 802.11 standard.

The access point 36 includes WLAN PHY and WLAN MAC layers 66 and 68, respectively, corresponding to the layers 64 and 62 of the mobile station. The access point is further shown to include Ethernet MAC and Ethernet PHY layers 72 and 74 functionally connected by way of a relay 76.

The Ethernet switching hub 42 includes an Ethernet PHY layer 78 and an Ethernet MAC layer 82 as well as a relay function 84. And, the interworking element 44 also includes an Ethernet PHY layer 86 and Ethernet MAC layer 88 corresponding to the layers 78 and 82. A WIP logical layer 92 of an embodiment of the present invention is also shown to form a portion of the interworking element. The layer 92 is positioned between the lower-level layers 86 and 88 and upper-level layers 94 and 96. The layer 94 forms a LLC layer, and the layer 96 forms a SNDCP/GMM layer. The interworking

element also includes a GTP layer 102, a UDP/TCP layer 104, an IP layer 106, and L2 and L1 layers 108 and 112.

Because the upper-level layers correspond to GPRS functional layers, the mobility management, authentication, security, user data encryption, and user data compression all provided pursuant to operation of such upper-level layers are again provided in the integrated system. On the radio interface 14, the GPRS LLC, and higher, layers are again utilized in the integrated system while the lower-level layers correspond to the layers of a WLAN system by which to transmit signaling and user data.

The WIP layers 52 and 92 provide for the performance of various functions, including the relaying of packet data between the upper-level layers and the lower-level layers. Additionally, the WIP layers provide for the transport of TLLIs (Temporary Logical Link Identifiers) and to insert a cell identifier into uplink data.

A message sequence diagram, shown generally at 114 in Figure 3, represents the transport of data in a connectionless, unacknowledged mode of operation. Signaling between a mobile station 12, an access point 36, and the interworking element 44 are represented in the sequence diagram. As the upper-level GPRS layers provide various levels of acknowledgment modes for supporting reliable user data transfer, an acknowledgment mode is not necessary in the WIP layer. Accordingly, the WIP layer provides a relay protocol in which data is not separated by type. That is to say, the WIP layer does not separate LLC PDUs and MM signaling. And, as a result, both are transportable by a UNITDATA PDU. As illustrated in the sequence diagram 114, any downlink MM signaling/PDP is transferable, indicated by the segment 116 between the IWE 44 and the mobile station 12. Thereafter, a WIP UNITDATA message, indicated by the line segment 118, is transmittable by the IWE 44 to the mobile station. The segment 118 represents a downlink transmission. Any uplink MM signaling/PDP is analogously represented by the segment 122. Thereafter, an uplink message forming a WIP UNITDATA

message, represented by the segment 124, is transmittable by the mobile station 12 to the IWE. The UNITDATA forming the downlink or uplink transmission is of any selected type, such as a PDU type, a TLLI value, a QoS profile, an IMSI value, an alignment octet, or a LLC-SDU.

5 To utilize the mobility management provided pursuant to a GPRS system, GPRS location management is mapped to the integrated system. Here, every WLAN AP is mapped to a GPRS cell. Every AP, thereby, has a unique cell ID number. In the exemplary implementation, mapping is performed at the WIP layer within the IWE 44. The IWE includes a static
10 table which maps every AP ID, e.g., a 48-bit MAC address, to a cell ID.

Figure 4 illustrates a message sequence diagram 126 which represents operation of the integrated communication system portion to perform the functions of identifying a current serving cell ID. The functions performed by the WIP layer are analogous to the operations performed in the GPRS system
15 by which a mobile station selects and identifies its current serving cell by a cell selection and reselection procedure. Analogously, in the integrated communication system portion, the mobile station is capable of moving between access points 36. While moving, the mobile station performs WLAN association, reassociation, and deassociation operations with successive ones
20 of the access points.

The message sequence diagram illustrates signaling between the mobile station 12, and access point 36, and the interworking element 44. WLAN authentication procedures are indicated by the segment 128. Once authentication procedures have been completed, the mobile station sends a
25 MAC association message, indicated by the segment 132, to the access point. Responsive thereto, the access point returns a corresponding MAC association message, here designated by the segment 134. Then, and as indicated by the segment 136, the mobile station sends a WIP cell ID request multicast message, by way of the access point 36 to the interworking element 44. And,
30 responsive thereto, the IWE returns a response message, indicated by the

segment 138 to the mobile station. Then, and as indicated by the segment 142, the mobile station passes on the cell ID. The messages indicated by the segments 132-134 correspond with standard WLAN association procedures set forth in the IEEE 802.11 standard.

5 The messaging represented in the message sequence diagram makes use of the Ethernet multicast and broadcast service by which to define a MAC multicast address for sending a cell ID request PDU to the interworking unit 44. All mobile stations and interworking units 44 in the communication system portion should belong to the multicast group. The access point 36,
10 however, is not required to belong to the multicast group as the access point do not understand the message indicated by the segments 136 and 138. After the interworking element 44 sends the response message 138, the interworking element functions to record the MAC address of the mobile station and the cell ID associated therewith in a converting table. The converting table is
15 used to insert the cell ID to uplink data.

 The WIP layer of the interworking element knows the MAC address for each WIP PDU received thereat. A mapping table containing the MAC address of the associated mobile station, the cell ID associated therewith, as well as the interworking element, is able to search for the cell ID of the
20 sending mobile station according to the MAC address of the sending mobile station. The interworking element passes the cell ID from which the LLC SDU is associated together with the LLC SDU to the appropriate LLC layer. Thereby, analogous to operation in a GPRS system, the function of the BSS GP layer enables the SGSN to know from which cell a LLC SDU originates.
25 The location of the mobile station is updated to the SGSN by checking the cell ID accompanied with the LLC SDU.

 The WIP layer further fulfills the requirement that a TLLI (Temporary Logic Link Identifier) is transportable from a LLC layer to a lower-level layer. Such transport is performed by encoding the TLLI field in a UNITDATA

PDU, as noted previously with respect to the messaging indicated with respect to Figure 2.

Paging is also performed pursuant to operation of the WIP layer. Paging is a basic function of the GPRS system. Figure 5 illustrates a message sequence diagram, shown generally at 146, and shows the messaging transported between the mobile station 12 and the interworking element 44 by way of access points 36. A page message, WIP PAGING, is indicated by the segment 148, sent by the interworking element to the mobile station 12. Responsive to detection at the mobile station of the paging message, a WIP-layer UNITDATA message, utilizing a TLLI is returned to the interworking element. The message is indicated by the segment 152 shown in the Figure.

The paging procedure provides a manner by which the interworking element 44 identifies the cell in which the mobile station is located. If the mobile station is within the coverage area of the interworking element, the interworking element is always aware of the cell in which the mobile station is located by effectuation of the WLAN association and cell ID inquiry procedure, noted previously. The paging procedure described here with respect to Figure 4 fulfills a GPRS GMM layer requirement.

Figure 6 illustrates a message sequence diagram, shown generally at 156. Again, messaging of signals transported between a mobile station and an interworking element 44, by way of an access point 36, is again represented. In the GPRS system, suspend and resume messages are used by the mobile station to order the LLC layer to suspend, or resume, frame transmission. The WIP layer provides this functionality without necessitating alteration of the LLC layer. A WIP SUSPEND message, indicated by the segment 158, is sent by the mobile station to the interworking element. Responsive thereto, the interworking element returns an acknowledgment message, indicated by the segment 162. Receipt at the interworking element 44 of a SUSPEND PDU indicates that the mobile station wants to suspend its GPRS WLAN integrated

service. The acknowledgment response is returned to provide a positive acknowledgment of the suspension.

Figure 7 illustrates a message sequence diagram, shown generally at 166, here representing messaging of signals between the mobile station 12 and the interworking element 44 to resume communications subsequent to a suspension to communication. Here, a WIP RESUME message is generated, indicated by the segment 168, is sent by the mobile station to the interworking element 44. Responsive thereto, the interworking element returns an acknowledgment message, indicated by the segment 172.

By implementing the PDU-based messages described in the preceding figures, the integrated communication system portion is able to support basic packet data service with the speedy WLAN radio part as well as providing wide area mobility management and security pursuant to the GPRS part.

The previous descriptions are of preferred examples for implementing the invention, and the scope of the invention should not necessarily be limited by this description. The scope of the present invention is defined by the following claims.

We claim:

1. In a packet radio communication system for communicating packet data, an improvement of an integrator for integrating operation of a first packet data system having at least a first packet-data-system element with operation of a second packet data system having at least a second packet-data-system element, thereby to form an integrated system of the packet radio communication system, said integrator comprising:

an integration element at least functionally coupled between the first packet-data-system element and the second packet-data-system element, said integration element for relaying packet data between the first packet-data-system element and the second packet-data-system element, the packet data of any selected information-element type of a plurality of element types defined in either of the first packet data system and the second packet data system.

2. The integrator of claim 1 wherein the packet radio communication system comprises a network infrastructure including a first fixed-site transceiver and at least a second fixed-site transceiver with which a mobile station is selectably connectable thereto by way of a radio link and wherein said integration element further maps identities of the first and at least second fixed site transceiver defined in the first packet data system to corresponding identities defined in the second packet data system.

3. The integrator of claim 2 wherein the packet radio communication system further comprises an interworking element (IWE) coupled to the first and at least second fixed site transceivers and wherein a portion of said integrator is embodied at the IWE.

4. The integrator of claim 3 wherein said integration element comprises a memory element forming a table, the table containing the identities of the first and at least second fixed site transceivers defined in the

002290-8866560

first packet data system and, indexed thereagainst, the identities of the first
 5 and at least second fixed site transceivers defined in the second packet data
 system.

5. The integrator of claim 2 wherein a portion of said integration
 element is embodied at the mobile station.

6. The integrator of claim 5 wherein the second packet data system
 comprises a WLAN (Wireless Local Area Network), wherein the first fixed-
 site transceiver and the at least second fixed-site transceiver comprise access
 5 points of the WLAN, and wherein the mobile station, at which a portion of
 said integration element is embodied, performs association operations
 selectably to form radio links with the access points.

7. The integrator of claim 6 wherein the packet radio
 communication system further comprises an interworking element (IWE)
 coupled to the first and at least second fixed-site transceivers and an Ethernet
 connection for coupling said IWE thereto and wherein the mobile station, at
 5 which a portion of said integration element is embodied, further performs cell
 identification request operations selectably to identify the mobile station to
 the IWE.

8. The integrator of claim 7 wherein the cell identification request
 operations further associate the mobile station with a cell identifier, the cell
 identifier defined pursuant to the first packet data system.

9. The integrator of claim 8 wherein said IWE further comprises a
 table, the table for storing indications of a n identity of the mobile station and
 the cell identifier, the cell identifier indexed against the identity of the mobile
 station.

10. The integrator of claim 9 wherein the mobile station is identified
 by a MAC address.

002290" GET 66550

11. The integrator of claim 10 wherein the first packet-data-system element comprises a LLC logic layer and wherein said integration element further transports a Temporary Logic Link Identifier (TLLI) between the LLC logic layer and the second packet-data-system element.

12. The integrator of claim 11 wherein said integration element further generates a page message to page the mobile station, the page message generated at an access point corresponding to the cell identifier identified in the table formed at said IWE.

13. The integrator of claim 12 wherein the portion of said integration element located at the mobile station responds to the page message with a response message, the response message including indications of the TLLI, the TLLI identifying the mobile station.

14. The integrator of claim 12 wherein the portion of said integration element located at the mobile station further selectably transmits a communication suspend message to the IWE, the communication suspend message for requesting suspension of communication of data to the mobile station.

15. The integrator of claim 14 wherein the portion of said integration element located at the mobile station further selectably transmits a communication resume message to the IWE, the communication resume message for requesting resumption of communication of data to the mobile station.

16. In a method for communicating packet data in a radio communication system having a network infrastructure including a first fixed-site transceiver and at least a second fixed-site transceiver with which a mobile station is selectably connectable by way of a radio link, an improvement of a method for integrating operation of a first packet data system having at least a first packet-data-system element with operation of a

00599138-062200
002290-86T6650

second packet data system having at least a second packet-data-system element, thereby to form an integrated system of the packet radio communication system, said method comprising:

- 20 mapping identities of the first and at least second fixed-site transceivers defined in the first packet data system to corresponding identities defined in the second packet data system;
- relaying packet data between the first packet-data-system element and a selected one of the first and at least second fixed-site
- 25 transceivers, the packet data of any selected information-element type of a plurality of element types defined in either of the first packet data system and the second packet data system.

17. The method of claim 16 wherein said operation of mapping comprises:

- indexing the identities of the first and at least second fixed site transceivers defined in the first packet data system against the
- 5 identities of the first and at least second fixed-site transceivers defined in the second packet data system.

18. The method of claim 17 wherein said operation of relaying comprises accessing the identities of the first and at least second fixed-site transceivers indexed during said operation of indexing, thereby to identify the first and second fixed-site transceivers in terms of a selected one of the first
- 5 and second packet data systems.

19. In a packet radio communication system defined in terms of local layers, an improvement of an integrator for integrating operation of a first packet data system having at least a first packet-data-system local layer and a second packet data system having at least a second packet-data-system
- 5 logical layer, said integrator comprising:

an integration logical layer logically positioned between the first packet-data-system logical layer and the second packet-data-system

0022290-82F5550

logical layer, said integration logical layer for relaying packet data between the first packet-data-system logical layer and the second packet-data-system logical layer, the packet data of any selected information-element type of a plurality of element types defined in either of the first packet data system and the second packet data system.

20. The integrator of claim 19 wherein the first packet data system comprises a GPRS (General Packet Radio Service) system, wherein the second packet data system comprises an IEEE 802-11 standard-compliant WLAN (Wireless Local Area Network) system and wherein said integration logical layer comprises a WLAN integration protocol layer layered above a logical layer of the IEEE 802.11 standard-compliant WLAN system and layered beneath a logical layer of the GPRS system.

002290-8ET66560

ABSTRACT

Apparatus, and an associated method, forms an integrated packet radio communication system. An integrated system is formed of portions of a GPRS system as well as portions of a WLAN system, such as that defined in the IEEE 802.11 standard. A WIP (WLAN Integrated Protocol) layer is defined, functionally positioned between upper-level, GPRS layers and lower-level, WLAN layers. Advantages of a GPRS system as well as advantages of the WLAN system are maintained in the integrated system.

002290" GET 66560

10

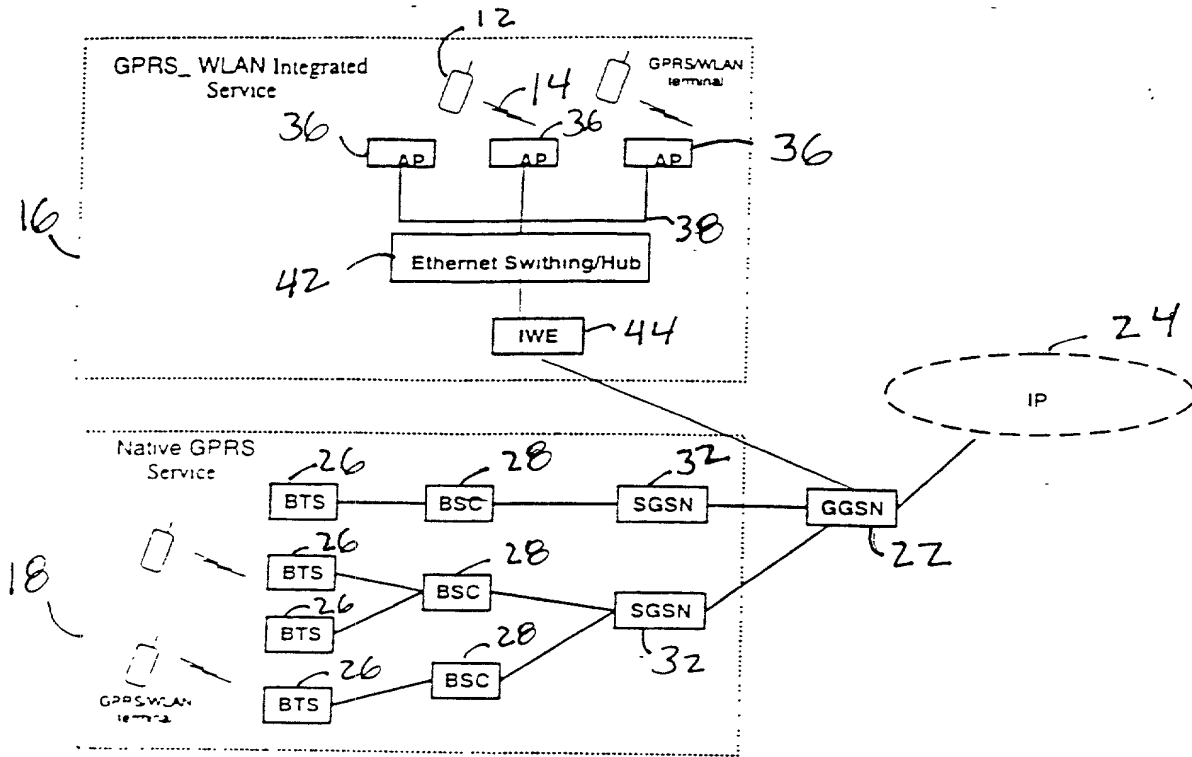


FIG. 1

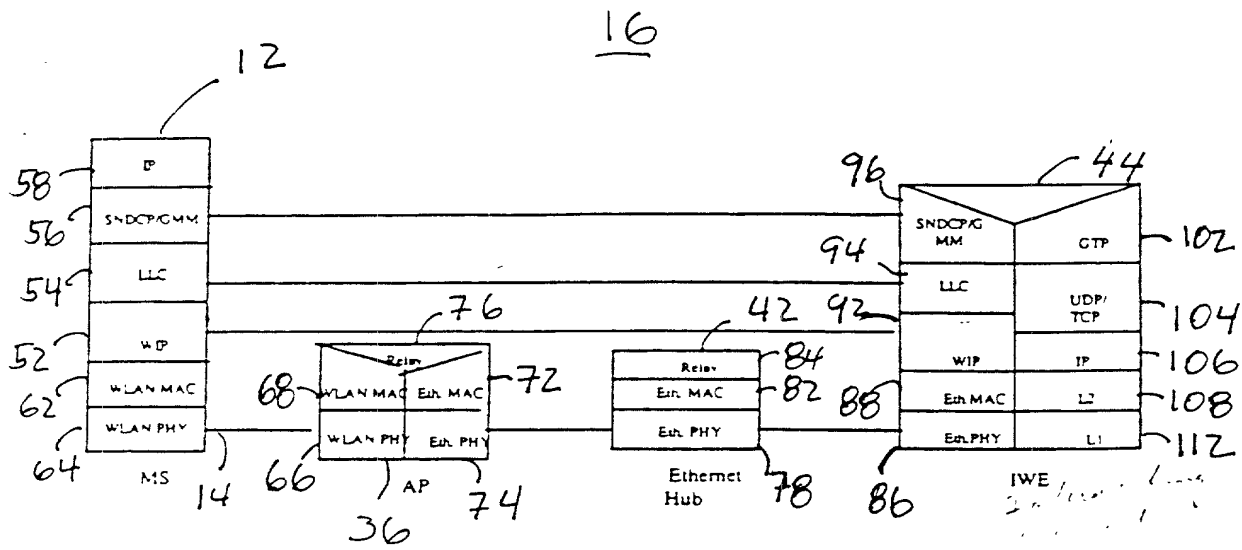


FIG. 2

Figure 1 consists of 12 bar charts, labeled (a) through (l), arranged in a 6x2 grid. Each chart displays the percentage of total protein in various fractions (A, B, C, D, E, F, G, H, I, J, K, L) for different cell lines and treatments. The y-axis is labeled 'Fraction' and the x-axis is labeled 'Protein'. The data is presented as a series of bars for each fraction, with the height of the bar indicating the percentage of total protein. The cell lines and treatments are: (a) Control, (b) 10⁻⁶ M, (c) 10⁻⁵ M, (d) 10⁻⁴ M, (e) 10⁻³ M, (f) 10⁻² M, (g) 10⁻¹ M, (h) 10⁰ M, (i) 10¹ M, (j) 10² M, (k) 10³ M, and (l) 10⁴ M. The fractions are: A, B, C, D, E, F, G, H, I, J, K, and L. The data shows that the percentage of total protein in each fraction varies significantly with the concentration of the treatment, with some fractions showing a sharp increase or decrease at specific concentrations.

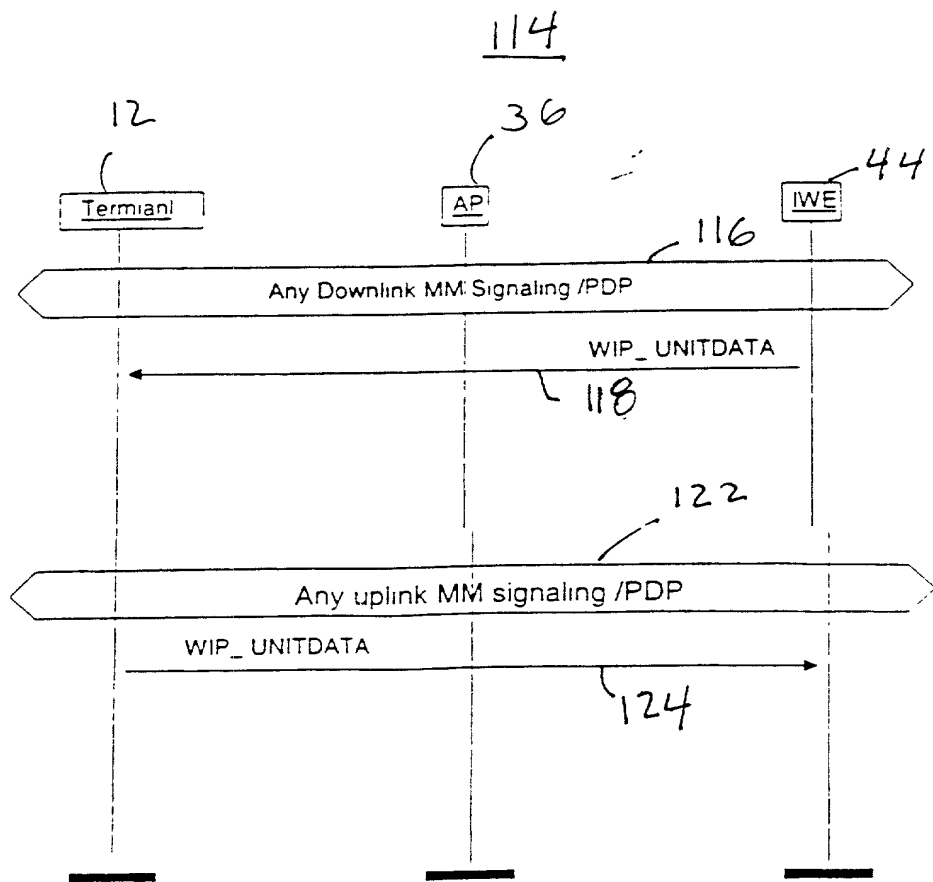


FIG. 3

002250 REF 66550

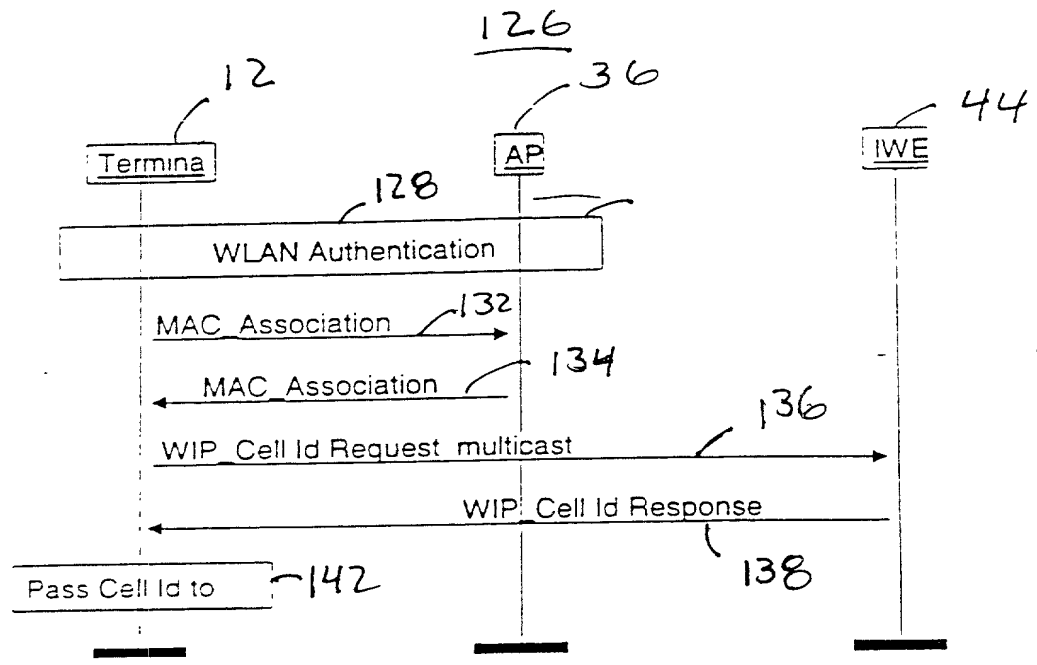


FIG. 4

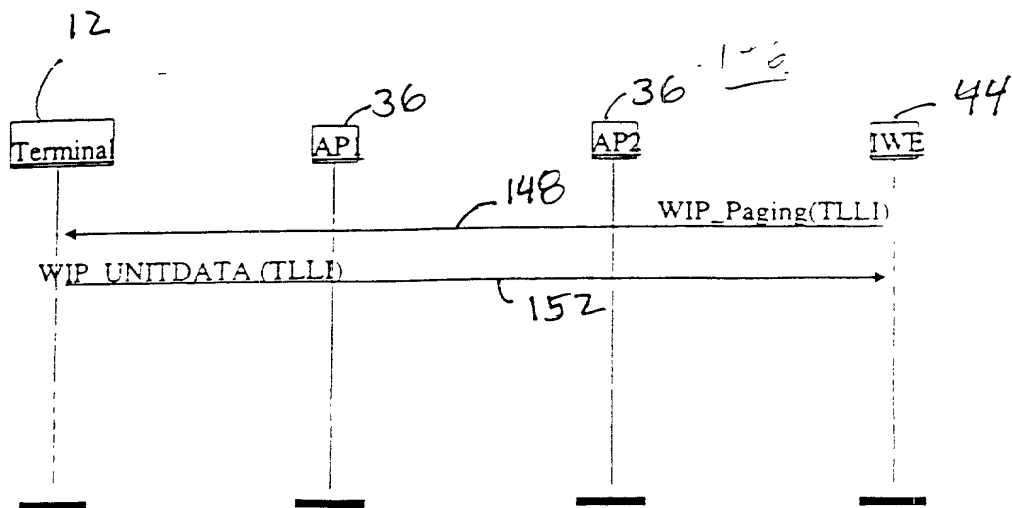


FIG. 5

Variable	Mean	SD	Min	Max
Age	34.5	10.2	18	65
Gender	0.5	0.5	0	1
Marital status	0.6	0.5	0	1
Education	12.5	1.5	9	16
Income	1500	500	500	3000
Health status	0.7	0.5	0	1
Smoking status	0.3	0.5	0	1
Alcohol consumption	0.2	0.4	0	1
Exercise frequency	0.4	0.5	0	1
Stress level	0.6	0.5	0	1
Sleep quality	0.5	0.5	0	1
Dietary habits	0.4	0.5	0	1
Work-life balance	0.3	0.5	0	1
Family support	0.6	0.5	0	1
Community involvement	0.2	0.4	0	1
Personal growth	0.4	0.5	0	1
Life satisfaction	0.5	0.5	0	1
Overall well-being	0.4	0.5	0	1

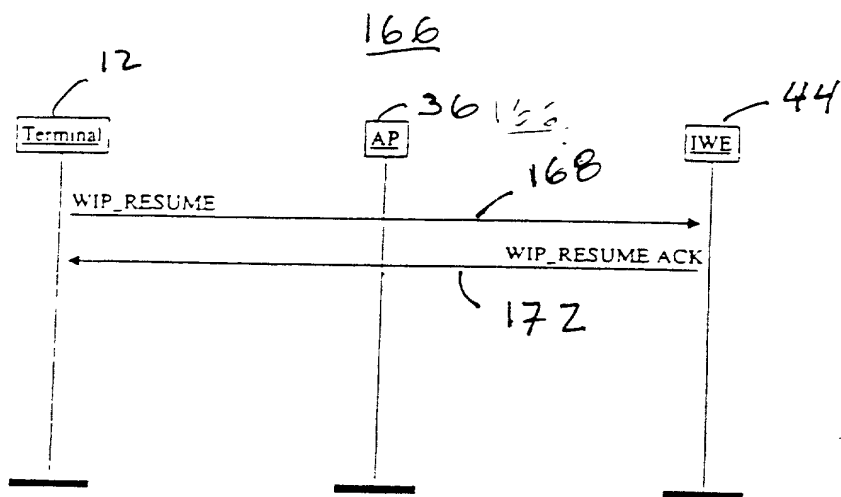


FIG. 7

156

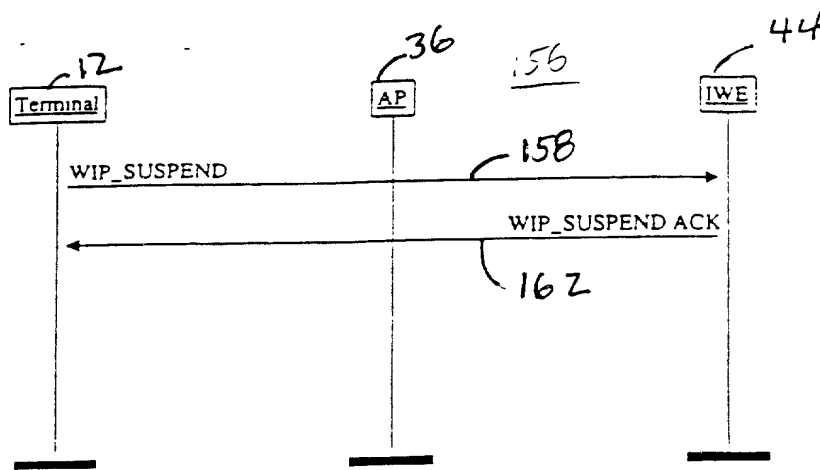


FIG. 6

PATENT
EXPRESS MAIL NO. EL498242367US
Attorney Docket No. NC18612
Client/Matter No. 40725.830101.000

COMBINED DECLARATION AND POWER
OF ATTORNEY FOR PATENT APPLICATION

DECLARATION:

As below named inventors, we hereby declare that:

Our residence, post office addresses and citizenship are as stated below next to our names.

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled APPARATUS, AND ASSOCIATED METHOD, FOR INTEGRATING OPERATION OF PACKET RADIO COMMUNICATION SYSTEMS, the specification of which was filed June 21, 2000.

The persons named as inventors in this application are Jianhua Wang, Arto Karppanen, Marko Suoknuuti, Jaakko Teinilä, and Jan-Erik Ekberg.

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

No prior foreign application for patent or inventor's certificate has been filed.

No priority claim is made under 35 U.S.C. § 119 or 35 U.S.C. § 120.

POWER OF ATTORNEY:

As named inventors, we hereby appoint Brian T. Rivers, Reg. No. 41,270, Robert C. Rolnik, Reg. No. 37,995, Milan I. Patel, Reg. No. 41,242, Jerald J. Gnuschke, Reg. No. 42,588, Paul Juhasz, Reg. No. 36,345, Allen Scott Lineberry, Reg. No. P44,873, Robert H. Kelly, Reg. No. 33,922, Robert G. Crouch, Reg. No. 34,806, Lee R. Osman, Reg. No. 38,260, James A. Pinto, Reg. No. 40,774, Earl C. Hancock, Reg. No. 19,472, F.A. "Sandy" Sirr, Reg. No. 17,265, and Patrick McBride, Reg. No. 39,295, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. Send all correspondence to: Robert H. Kelly, HOLLAND & HART^{LLP}, 555 17th Street, Suite 3200, P.O. Box 8749, Denver, Colorado 80201, and direct telephone calls to Robert H. Kelly, telephone number

002290-8876560

719-475-6463.

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name:	Jianhua Wang
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	Viipurinkatu 1 A 2 FIN-00510 Helsinki Finland
Citizenship:	
Post Address Office:	same as residence address above

Inventor's Full Name:	Arto Karppanen
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	Vattuniemenkatu 4 D 64 FIN-00210 Helsinki Finland
Citizenship:	
Post Address Office:	same

Inventor's Full Name:	Marko Suoknuuti
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	Santakatu 1 B 36 FIN-00180 Helsinki Finland
Citizenship:	
Post Address Office:	same as residence address above

Inventor's Full Name:	Jaakko Teinilä
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	Iltatie 10 C 9 FIN-00210 Helsinki Finland
Citizenship:	
Post Address Office:	same

Inventor's Full Name:	Jan-Erik Ekberg
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	Seljatie 1 A 5 FIN-00320 Helsinki Finland
Citizenship:	
Post Address Office:	same